

IWL 330

48 x 40



Nestable plastic pallet in imperial units 48" x 40" for medium loads

The Nest US5 is the universal 48x40 inch pallet. Suitable for medium loads, it offers a choice between a nestable version and three different runner versions (3, 5 and 6 runners). The nestable version saves floor space and transport costs when pallets are empty. The skid versions enable a smooth run on roller or chain conveyor and with 6 runners this pallet provides excellent stability for block stacking.

Bottom support



> 9 feet (9F)



> 3 runners (3R)



> 5 runners (5R)



> 6 runners (6R)

Deck options



> open deck (OD)




Optional without safety rim

Technical data*1

| | Previous name | Bottom support | Top deck | Dimensions [in] / [mm] | Load capacities**2 [lbs] / [kg] | | | Weight [lbs] / [kg] | |
|------------------|---------------|--------------------|----------|--|---------------------------------|--------------|-----------|---------------------|-----------|
| | | | | | Static | Dynamic | Racking | HDPE | ACM |
| Nest US5 (0D-9F) | CPP 330 | 9 feet, nestable | open | 48.0 x 40.0 x 5.5 1219 x 1016 x 140 | 8800 4000 | 3100 1400 | — | 20.5 9.5 | 22.0 10.0 |
| Nest US5 (0D-3R) | CPP 333 | 3 runners, snap-on | | | 4400 2000 | — | 28.5 13.0 | 30.0 13.5 | |
| Nest US5 (0D-5R) | CPP 335 | 5 runners, snap-on | | 17600 8000 | 5300 2400 | 1300 600 | 30.0 13.5 | 32.0 14.5 | |
| Nest US5 (0D-6R) | CPP 336 | 6 runners, snap-on | | | | | 31.0 14.0 | 33.0 15.0 | |

Entry: 4 ways | Nesting height: 1.9 in / 48 mm | Safety rim: 0.2 in / 5 mm (optional without)

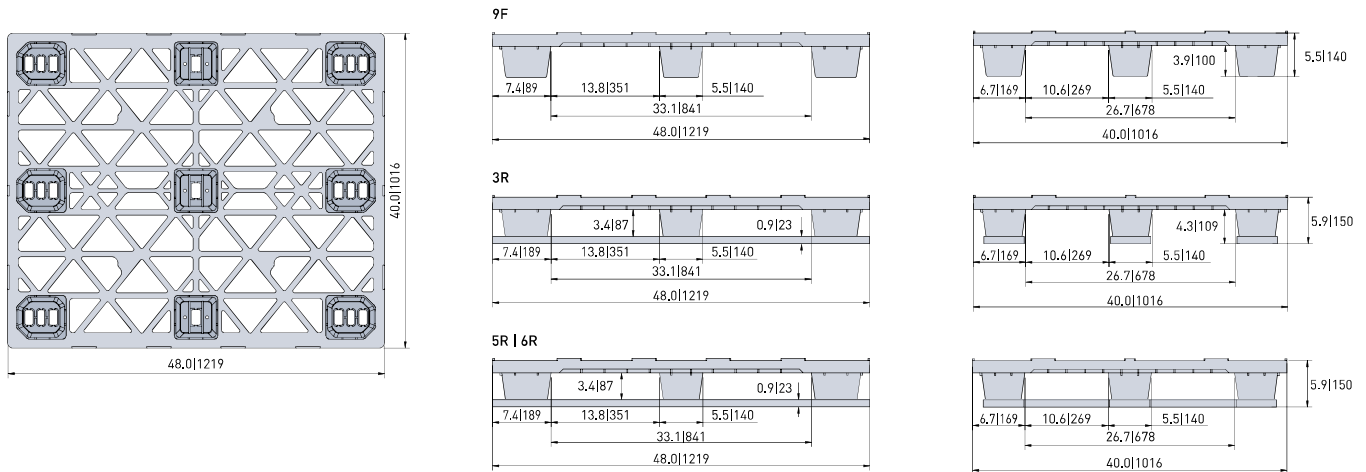

nominal sizes in inch | mm

Options

Color: [other colors on request*3] > Individual marking*3

Anti-slip: safety rim

ESD prevention: —



*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (68°F / 20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required ACM pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.